


REF: 48 BM OP 3P

Fiber surface & wall mounted box 3 ports

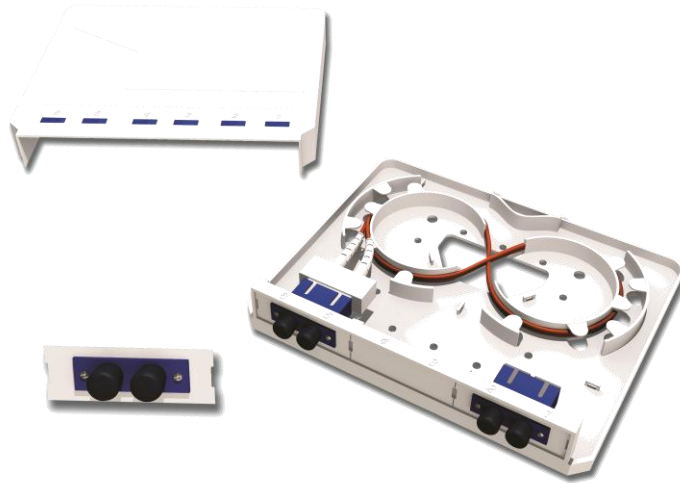

P/N: 48BMOP3P (shown loaded)

Applications

The fiber surface mounted box is a consolidation point or a termination outlet for indoor applications. It is delivered unloaded, ready to receive ST or SC adapters.

General Characteristics

- Surface/wall mounted ABS box for 3 x adapter plates.
- Receives up to 6 fibers, ST or duplex SC multimode or singlemode
- Including cable management hooks for bending radius protection
- Suitable for indoor applications only
- Multiple cable entry possibilities : 2 x on rear cover, 2 x on side cover

Physical properties


- ABS compound
- RAL 9003
- IP 20
- Operating temperature : -15°C to + 60°C
- 2 x rear cable entries
- 2 x side cable entries
- Dimensions : Width 180 mm x depth 150 mm x height 33.33 mm
- Weight : 0.198 kg

REF: 48 BM OP 3P

Fiber surface & wall mounted box 3 ports

Related products

Part numbers	Description	Packing
48 BM OP ST	Adapter plate for 2 x ST adapters	Unit
48 BM OP SC	Adapter plate for 1 x duplex SC adapter	Unit
48 BM OP OB	Adapter plate blank	Unit

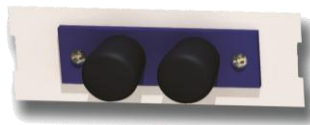

48BMOPST
(Delivered unloaded)

Standards

Tested to comply with the requirements of :

- TIA/EIA 568 C.3,
- ISO/IEC 11801 Amd 1.0 / Amd 2.0,
- EN 50173, EN 297-1
- IEC 60304, IEC 61754
- ROHS, REACH, SvHC

Ordering Information

Part numbers	Description	Packaging
48 BM OP 3P	Fiber surface & wall mounted box for 3 adapter plates	Unit