


48FTTH4

FTTH fiber optic box with 4 SC APC adapters

+ BENEFITS

- Allow the connection up to 4 fibers
- Rail DIN or wall mounting
- Ports identification thanks to a color system

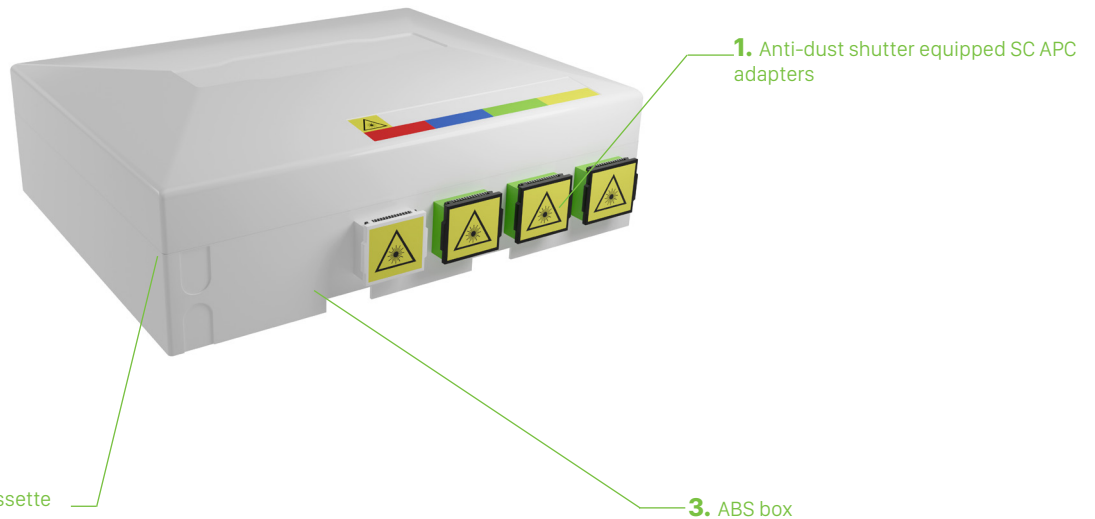

DESCRIPTION / APPLICATIONS

The 48FTTH4 box allows to connect up to 4 fibers. It is used as an optical termination point for the FTTH indoor applications. It integrates the fiber splicing and protects the connection thanks to its anti-dust shutters.

ENVIRONMENTAL PROPERTIES

OTO box dimension	100 x 80 x 30 mm
Weight	0.4 Kg
Material	ABS
Mounting type	Wall/DIN rail
Temperature of use	-40°C to +85°C

PRODUCT SPECIFICATIONS

Adapters	SC APC
Attenuation	< 0.2 dB
Return loss	> 60dB (APC)

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	PACKAGING
48FTTH4	FTTH fiber optic box with 4 SC APC adpaters	Unit