


REF: BC6NBPANSBxx

19" loaded CAT6 unshielded patch panel 24 ports on 1U or 48 ports on 2U with support bar

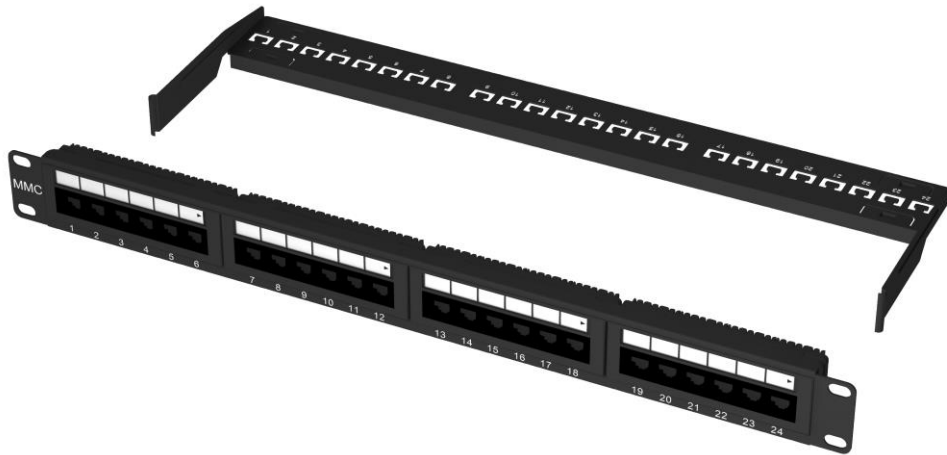

Descriptions

- Integrated panel 1U 24 loaded CAT6 unshielded ports or 2U 48 unshielded CAT6 ports
- 19" format
- Rear support bar equipped with cable manager system
- 180° punch down termination : vertical printed circuit with DUAL IDC connectors dedicated for cable AWG23 to AWG24
- Color coding TIA 568 A or B
- Steel panel epoxy painted – Dark grey

Properties

Performance	
EIA / TIA	568-C.2 CAT6
ISO	ISO 11801 Ed2.2 Class E
EN	EN 50173-1:2011 Class E
Contact	Bronze / Nicke + gold plating
IDC	110 DUAL IDC Phosphor Bronze
Contact resistance	< 20mΩ IEC 60512-2-1
Voltage	≥ 1000V DC contact to contact
Cycles of insertion	1000 nom
Operating voltage	≤ 72V DC



REF: BC6NBPANSBxx

19" loaded CAT6 unshielded patch panel 24 ports on 1U or 48 ports on 2U with support bar

Related product

Item P/N	Designation	Packaging
MMCMTAT	Punch down tool	Unit

Ordering information

Item No	Designation	Packaging
BC6NBPANSB24	19" loaded CAT6 unshielded patch panel 24 ports 1U with rear support bar	UNIT
BC6NBPANSB48	19" loaded CAT6 unshielded patch panel 48 ports 2U with rear support bar	UNIT