


DCFANOUTKITxxC

Fanout Kit for DC panel 12 or 24 fibers

+ BENEFITS

- Direct fiber connection 250µm
- Suitable for tubes from Ø 3 to Ø 4.5mm
- Simple mechanical operation
- DC version for DC K7 x 12 and 24 fibers



P/N: DCFANOUTKIT12C

APPLICATIONS

This DC FANOUT KIT range is ideal for panel high density applications for Data Centers, but can obviously be used in other types of networks.

The DC FANOUT KIT facilitates by overjacketing the loose structures and allows direct connexions with the DC K7 range.

STANDARD


INSERTION LOSS: EN 50173

SYSTEM : ISO11801 ED2.2 EIA/TIA568-C.3

ENVIRONMENTAL PROTECTION: RoHS et SvHC compliant

UHD PANEL 3U 288C

RELATED PRODUCTS

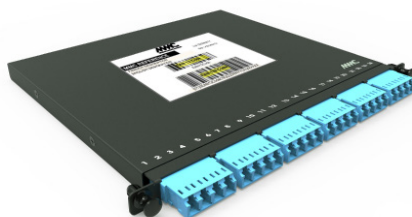

DCK706PLCQOM3 or DCK706ALCQOM3

DESCRIPTION	PART NUMBER	PACKAGING
EQUIPPED SLIM FANOUT CASSETTE (WITH ADAPTERS ONLY)		
Part numbers for FANOUT cassette	DCK706Ayyywww	Unit
Replace yyy by the type of adapters	LCQ, LCAQ*, SCD, SCAD*	
Replace www by the performance of adapters	<ul style="list-style-type: none"> • OS2 (blue /green) • OM3 (Aqua) OM4 (Erica violet) OM5 (Lime green) 	
EQUIPPED SLIM SPLICE CASSETTE (WITH ADAPTERS + PIGTAILS)		
Part numbers for SPLICE cassette	DCK724Pyyywww	Unit
Replace yyy by the type of adapters	LCQ, LCAQ*, SCD, SCAD*	
Replace www by the performance of adapters	OM3, OM4, OM5, OS2	

*Consult us

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	PACKAGING
DC FANOUT KIT 12C	Optical FANOUT KIT for 12 fibers	Unit
DC FANOUT KIT 24C	Optical FANOUT KIT for 24 fibers	Unit