



ES42810

19" Cabling cabinet 42U 800x1000 Essential line



RAL7016



625Kg



42U



800x1000

Benefits

- Loading capacity up to 625Kg
- Excellent stability
- 19" front and rear mountings

STRONG MECHANICAL STRUCTURE

- Frame 20/10 thickness offers an excellent stability to the cabinet even in the case of maximum loading
- 2 reinforced bars to offer a loading capacity tested up to 625Kg




- Single roof equipped with perforation for natural ventilation and pre cut entry to offer access to inside the cabinet
- Reinforced roof to avoid any steel distortion
- 19" front and rear mountings, 20/10 thickness, in galvanized steel to ensure an electrical continuity to the ground : hole management cable available on mounting cabinet width 800
- Numbering of U in the two ways : cabling is easier if you start from top or bottom
- Adjustable mounting depth
- Front door
- 270° opening of door for a better cabinet accessibility
- Rear panel
- Quick release side and rear panel with 1/4 turn (without key)
- Empty base for full access inside the cabinet



ES42810

19" Cabling cabinet 42U 800x1000 Essential line

DIMENSIONS

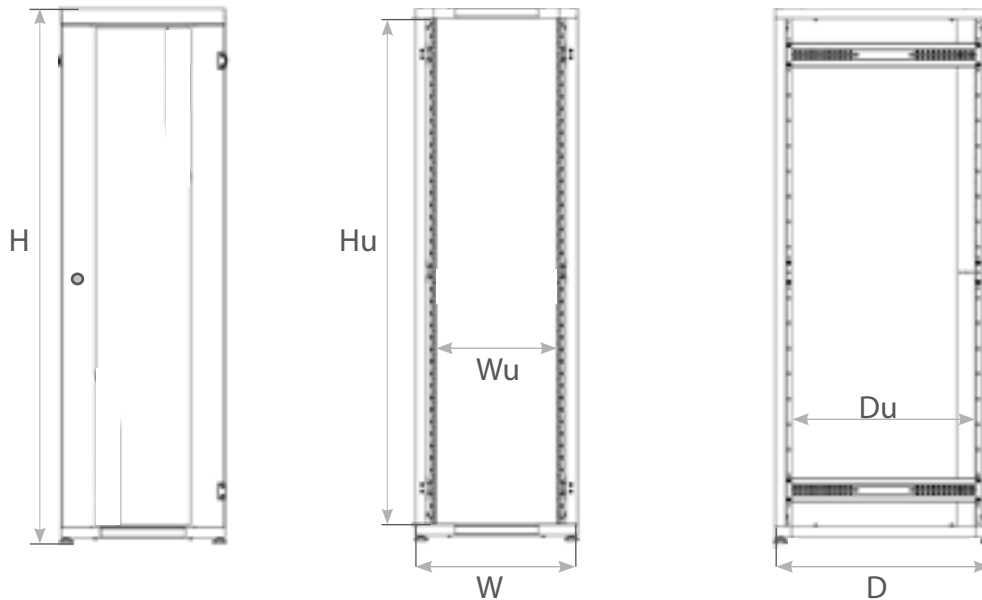

H	Hu	W	Wu	D	Du
1990	1867	809	726	1076	960

RELATED PRODUCTS

SHELVES		
	BSERVPF720G	19" fixed plate 1U for Server cabinet depth 720mm
	49PM1U250G	19" modem shelf 1U depth 250mm
	BPFxU450AD	Fixed 19" adjustable shelf : 1U for 450mm depth and 2u for 550mm depth (with rear mounting)
	BPG1Uxxx	19" sliding shelf 1U 350 or 550mm depth (with rear mounting associated)
ACCESSORIES		
Electrical	BMASSE19	19" grounding kit for cabinet
Ventilation element	ACBxV	Block of 2 or 4 ventilators for roof installation
	ACTHERMOST	Thermostat for ACBxV fan
Mechanical element	ACCASTOR	Castor set for Essential and Technic cabinet
	ACJUNCTION	Junction kit for 19" cabinet
	ACRINGS6	Set of 6 rings for the cable management (only for mounting of 800mm width)

ORDERING INFORMATION

P/N	DESCRIPTION	PACKAGING	WEIGHT
ES42810	19" Cabling cabinet 42U 800x1000 - Essential line	Unit	127 Kg

