


NAC3PXTOP

Chassis Double PowerCon True1 TOP



+ ADVANTAGES

- True Outdoor Protection (TOP) connector
- Waterproof and robust for harsh and demanding environments
- Power connector with breaking capacity
- Easy and reliable locking system

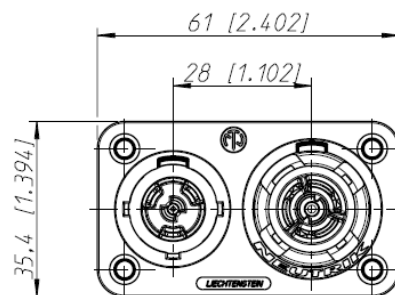

DESCRIPTION / APPLICATIONS

- Sound system
- Lights
- Signage and LED screens

STANDARD

CONNECTOR : Certified UL498

FLAMMABILITY : UL 94 V-0

PROTECTION CLASS : IP 65, UL50E

ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE : $\leq 3 \text{ m}\Omega$

DIELECTRIC STRENGTH :

4kVdc / 2.8 kVac

INSULATION RESISTANCE :

$>0.1 \text{ G}\Omega$ IEC 68-2-30

NUMBER OF ELECTRONICAL CONTACTS :

2 + PE

RATED CURRENT PER CONTACT :

16 A rms

RATED VOLTAGE :

250 V ac

MECHANICAL / TECHNICAL PROPERTIES

LIFETIME : > 5000

TEMPERATURE RANGE : -30°C à $+80^\circ\text{C}$

WIRESIZE : 2.5 mm^2

WIRESIZE : 12 AWG

CONTACTS : Copper

SHELL : Polyamide

ORDER INFORMATION

PART NB	DESCRIPTION	PACKAGING
NAC3PXTOP	CHASSIS DOUBLE POWERCON TRUE1 TOP	Individually