




## REF: Sxxxyy

19" cabinet for Server and active equipment – SERVER range



**+ 12U vertical available on cabinet 800mm width**



**1000 Kg**

## Descriptions

### • ENHANCED MECHANICAL STRUCTURE

- Aluminium trihedral angle which give an excellent rigidity and stability of the cabinet even in case of maximum load
- 6 reinforced bar studied to allow a load capacity up to 1000kg
- Sturdy structure in steel sheet
- 19" front mounting, thickness 20/10, in galvanized steel to ensure an electrical continuity for the ground
- Adjustable mounting depth by a slide system
- 80% perforated front and rear doors for an excellent natural ventilation
- Simple and perforated roof to allow a natural ventilation
- RAL 9005



### • EASY ACCESSIBILITY

- 180° opening doors for a better accessibility in the cabinet
- 12U vertical available on the 19" mounting : 3U per mounting
- Wide entry equipped with panel brush on the roof in order to facilitate configurations « Top of Server »



## REF: Sxxyyy

19" cabinet for Server and active equipment – SERVER range



- Quick release and reversible door
- Front door equipped with a 3 points locking mechanism
- Side panel : easy to release, lockable and removable
- Sliding access panel on the bottom equipped with a rubber joint to avoid cable pinch



### Related product

Accessories for server and switch		
Shelves	<b>BPFxUyyyAD</b>	Fixed 19" adjustable shelf : 1U 450mm depth or 2U depth 450/550mm or 750mm 450/550 or 750mm
	<b>BSERVPx720G</b>	Plateau glissière ou fixe profondeur 720
Security and ventilation element		
Electrical	<b>BMASSE19</b>	Grounding kit for 19" cabinet
Ventilation element	<b>ACB2V</b>	2 fans module for roof installation
	<b>ACB4V</b>	4 fans module for roof installation
	<b>ACTHERMOST</b>	Thermostat for fans
Mechanical elements	<b>ACxSERVBASC</b>	Plinth against failover
	<b>ACJUNCTION</b>	Junction kit for 19" cabinet

### Drawings & dimensions

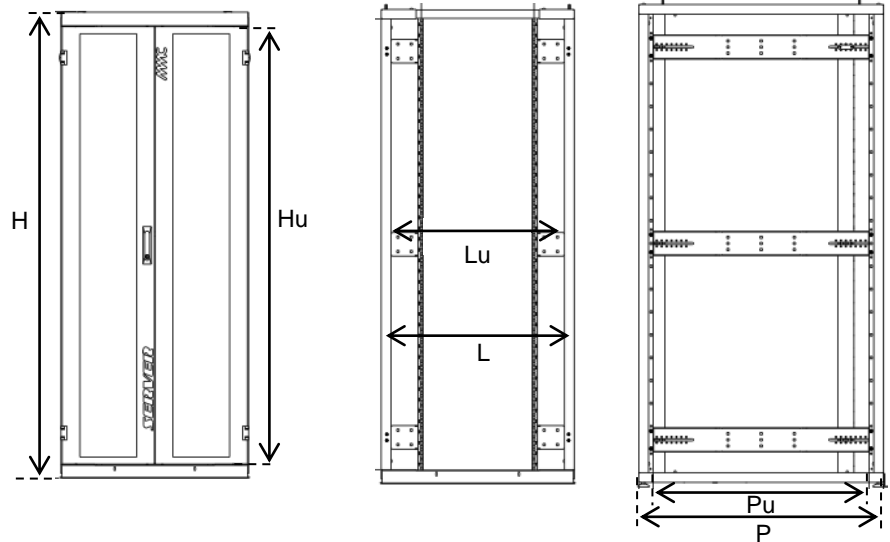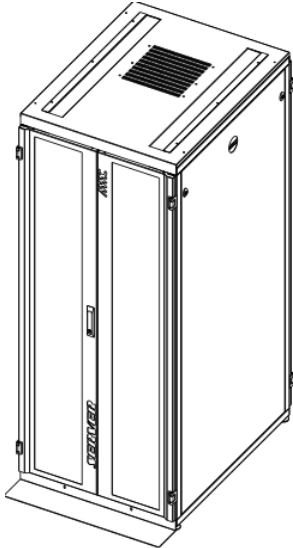


Part number	H	Hu	L	Lu	P	Pu	Weight
S42610	2015	1866.9	609	526	1076	979	118.4 Kg
S42810	2015	1866.9	809	726	1076	960	156.5 Kg

**REF: Sxxyyy**

19" cabinet for Server and active equipment – SERVER range

**Ordering information**

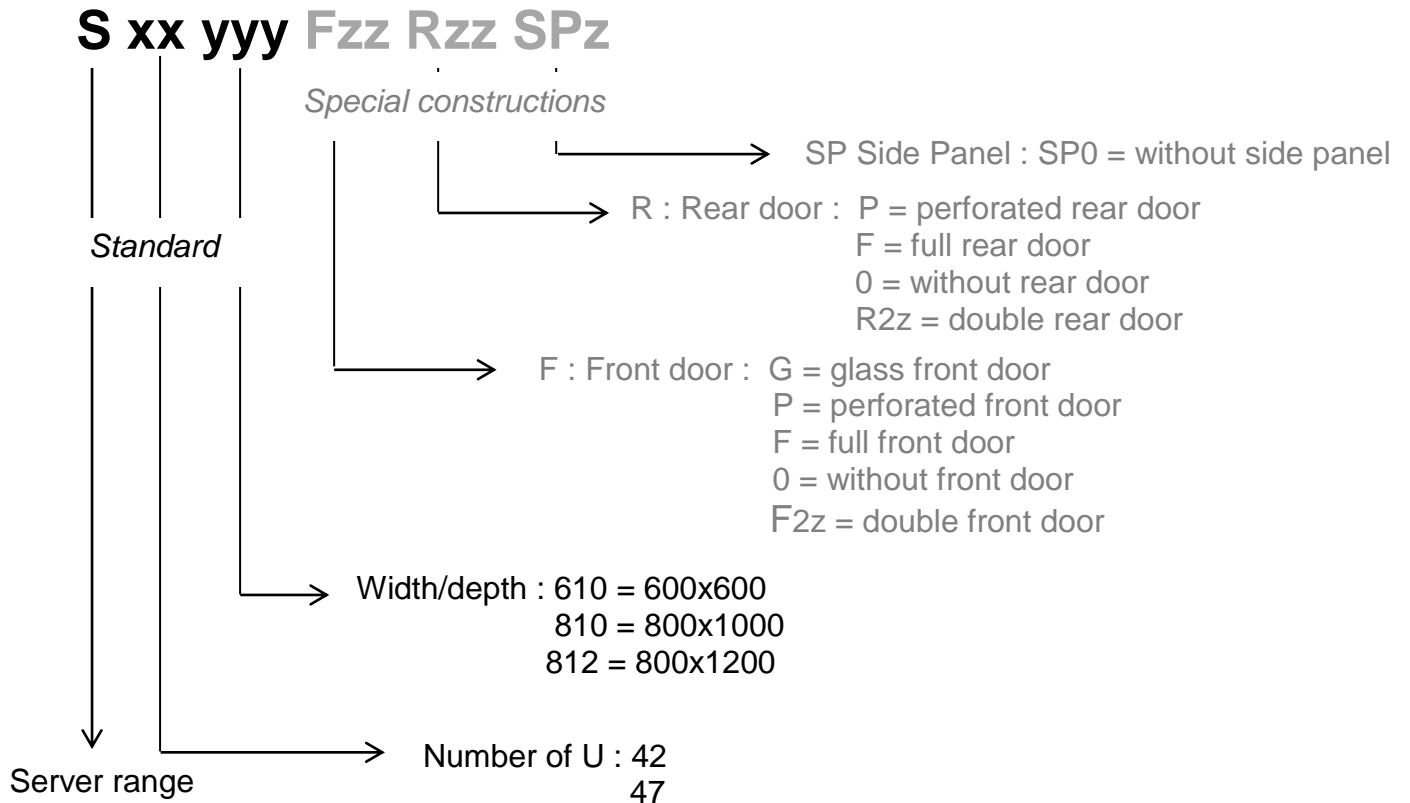

Number of U	Part number	Designation	Loading capacity	Flat pack Available
42U	<b>S42610</b>	19" cabinet 42U 600x1000 – SERVER range	1000 Kg	NON
	<b>S42810</b>	19" cabinet 42U 800x1000 – SERVER range	1000 Kg	NON
	<b>S42812</b>	19" cabinet 42U 800x1200 – SERVER range	1000 Kg	NON
47U	<b>S47810</b>	19" cabinet 47U 800x1000 – SERVER range	1000 Kg	NON
	<b>S47812</b>	19" cabinet 47U 800x1200 – SERVER range	1000 Kg	NON