





600x600 / 600x800
800x600 / 800x800
800x1000



27U/33U/42U/
47U

+ vertical 12U available on
800mm width



800 Kg

Description

• ENHANCED MECHANICAL STRUCTURE

- Aluminium trihedral angles enabling an excellent rigidity and stability of the cabinet even in case of maximum loading
- 6 reinforced bar studied to allow a loading capacity up to 800kg
- 19" front mounting, 20/10 thickness, in galvanized steel to ensure an electrical continuity to the ground
- Sturdy structure in steel sheet
- Simplified double roof mounted on brace to allow a better heat dissipation
- Adjustable mounting depth by slide system
- Epoxy Grey painting RAL 7016
- Grounding kit



• EASY ACCESSIBILITY

- 180° opening doors for a better cabinet accessibility
- Roof equipped with a precut entry and panel brush allow different entry with a maximal aperture up to 550mm
- Pre cutted aperture on the rear of the roof for a cable entry from the back
- 12U vertical available on the 19" mounting : 3U per mounting
- Possibility to equip the cabinet with vertical cable tray (optional)

REF: Txxyyy


19" floor standing cabinet – TECHNIC range

- Quick release doors
 - Reversible front door
 - Secured and tempered glass front door equipped with a 3 points locking mechanism with turning lever lock
 - Side panel : easy to release, lockable and removable
 - Sliding access panel at the bottom of the cabinet equipped with a rubber seal to avoid cable pinch
- **OPTIONNAL FLAT PACK STYLE**
 - « eXtensible » cabinet structure allows a flat pack mode with a 70% pre-assembled cabinet to make easier access to narrow space
 - Cabinet assembly less than 10 minutes

Related Product


Accessories for server and switch		
Shelves	49PM1U250G	19" 1U modem shelf depth 250mm
	BPFxUyyyAD	Fixed 19" adjustable shelf : 1U 450mm depth or 2U depth 450/550mm or 750mm 450/550mm or 750mm
	BPG1Uxxx	19" telescopic shelf 350 or 550mm depth
Security and ventilation element		
Electrical	BMASSE19	Grounding kit for 19" cabinet
Ventilation elements	ACB2V	2 fans module for roof installation
	ACB4V	4 fans module for roof installation
	ACTHERMOST	Thermostat for fans
Mechanical element	ACCASTOR	Castor set for Classic and Technic cabinet
Accessories		
Cable tray	CABLTRYyyxx	Cable tray 200mm or 300mm width

Drawings & dimensions

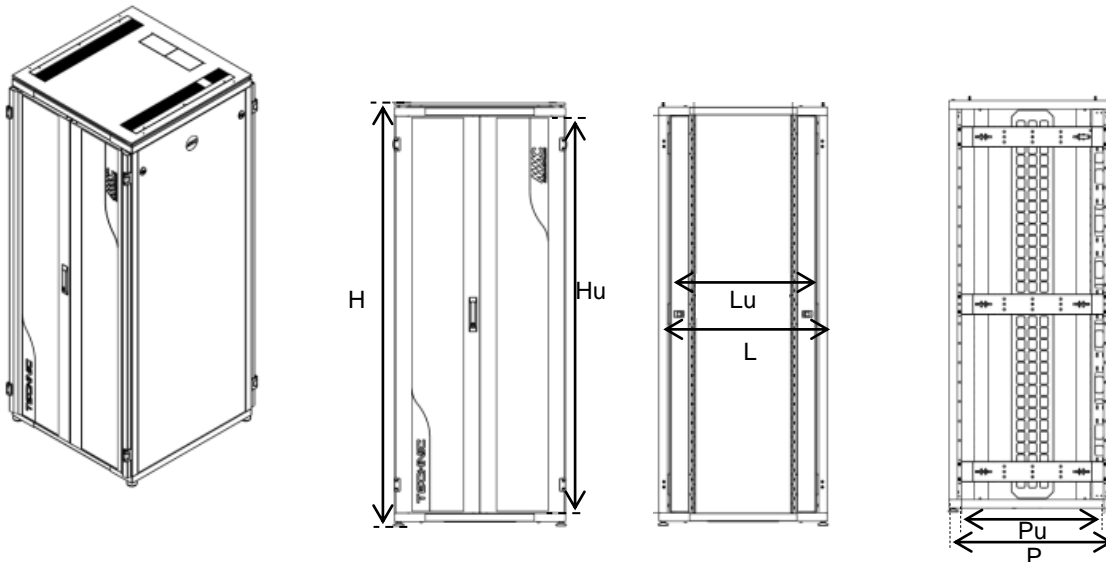

Part number	H	Hu	L	Lu	P	Pu	Weight
T2766	1328	1200.15	609	526	676	577	81.2 Kg
T3366	1595	1466.85	609	526	676	577	90 Kg
T3388	1595	1466.85	809	726	876	760	134.9 Kg
T4266	1995	1866.9	609	526	676	577	107.8 Kg
T4268	1995	1866.9	609	526	876	760	121 Kg
T4286	1995	1866.9	809	726	676	577	105 Kg
T4288	1995	1866.9	809	726	876	760	168.5 Kg
T42810	1995	1866.9	809	726	1076	960	176.3 Kg
T4768	2217	2089.15	609	526	876	760	132.4 Kg
T4788	2217	2089.15	809	726	876	760	171.6 Kg

Ordering information

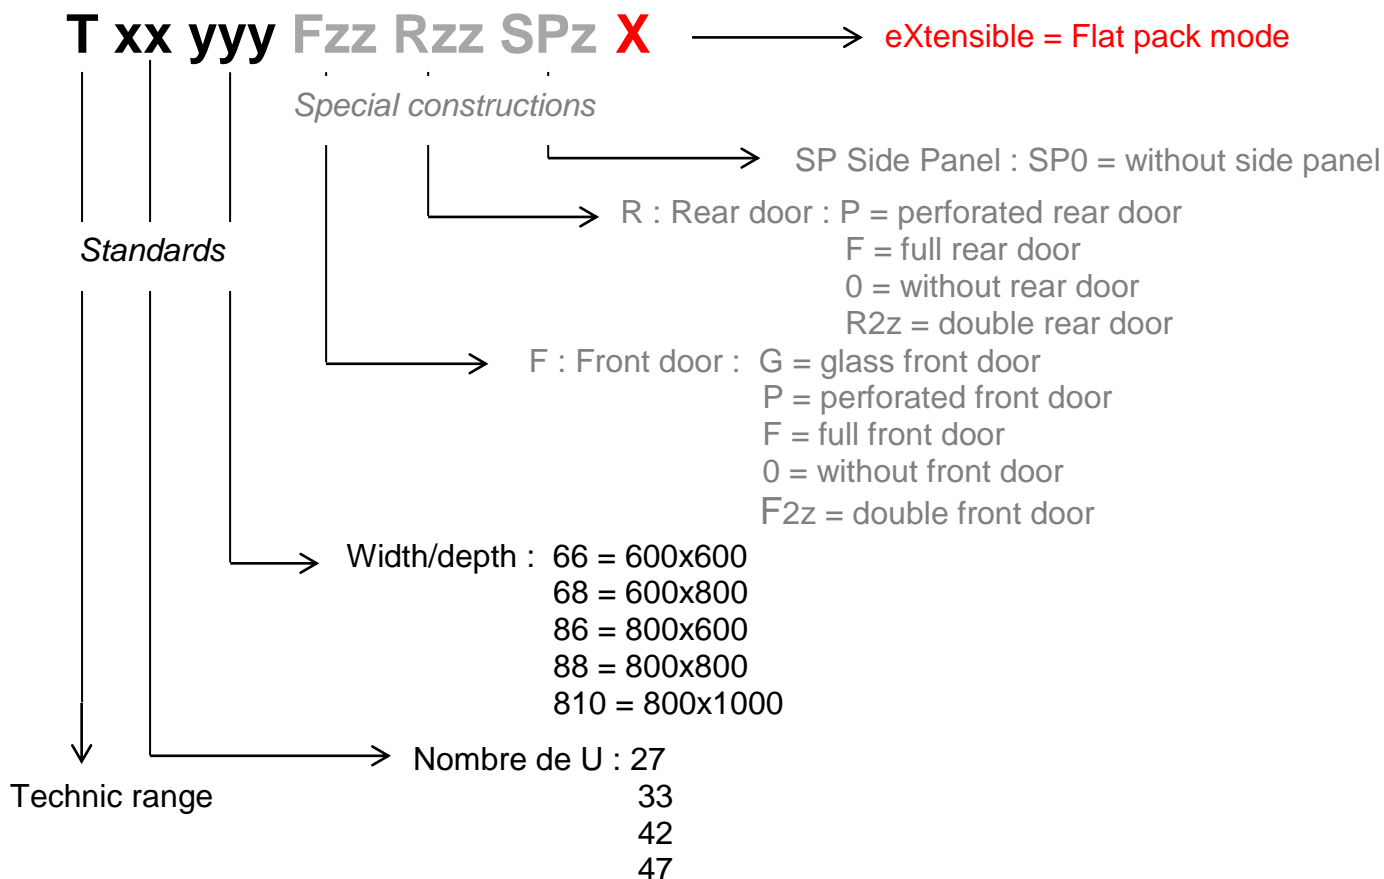

Number of U	Part number	Designation	Load capacity	Flat pack available
27U	T2766	19" floor standing cabinet – TECHNIC range 27U 600x600	800kg	on request
33U	T3366	19" floor standing cabinet – TECHNIC range 33U 600x600	800kg	on request
	T3388	19" floor standing cabinet – TECHNIC range 33U 800x800	800kg	on request
42U	T4266	19" floor standing cabinet – TECHNIC range 42U 600x600	800kg	YES
	T4268	19" floor standing cabinet – TECHNIC range 42U 600x800	800kg	on request
	T4286	19" floor standing cabinet – TECHNIC range 42U 800x600	800kg	on request
	T4288	19" floor standing cabinet – TECHNIC range 42U 800x800	800kg	YES
	T42810	19" floor standing cabinet – TECHNIC range 42U 800x1000	800kg	on request
47U	T4788	19" floor standing cabinet – TECHNIC range 47U 800x800	800kg	Non