




## VG6xSHBB

100Ω U/UTP CAT6 4 pairs cable 250MHz LSZH sheath

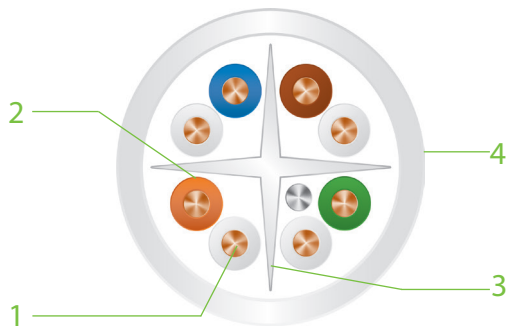

1. Conductor : solid bare copper AWG23
2. Insulation : PE HD
3. Central member : White or transparent thermoplastic cross
4. Outer sheath : LSZH - White RAL 9003

## DESCRIPTIONS

U/UTP cable 4 pairs, VG6xSHy, can be used in horizontal link or vertical configuration as backbone. It constitutes the base of a structured cabling network and can support all the IP application.

Performances of the VG6xSH exceed the current standards, use with Multimedia Connect connectivity it will ensure conformity with Class E / CAT6 channel.

## APPLICATIONS

Ethernet Base T up to 1Gbits/s	TOKEN RING 4/16 MBITS
ISDN	ATM 155, 622Mbits/s & 1.2Gbits
IEEE 802.3 af PoE	

## STANDARDS

CABLE	IEC 61156-5 CAT6
SYSTEME	ISO / IEC 11801 Ed2.2 Class E

## ELECTRICAL PROPERTIES

Max linear electrical resistance	95 Ω/Km
Mutual capacity (nom)	45 pF/m
Characteristic impedance	100 +/- 15Ω
Nominal Velocity Propagation	69% (+/- 2%)





## VG6xSHBB

100Ω U/UTP CAT6 4 pairs cable 250MHz LSZH sheath

### ENVIRONMENTAL PROPERTIES

CPR Level	Dca - s2,d2,a2
Fire behaviour	IEC 60332-1
Operating Temperature	-20°C / +70°C
Minimum bending radius	8 x cable diameter
Compliant to RoHS	

### TRANSMISSION PERFORMANCES @20°C

Freq (Mhz)	Attenuation		NEXT (dB)		PS NEXT (dB)		ACR-F (dB)		PS ACR-F		RL (dB)	
	standard (*)	typical value	standard (*)	typical value	standard (*)	typical value	standard (*)	typical value	standard (*)	typical value	standard (*)	typical value
4	3.8	3.5	66.3	69	63.3	66	55.8	67	52.8	64	23.0	25
10	6.0	5.5	60.3	63	57.3	60	47.8	60	44.8	57	25.0	28
16	7.6	6.9	57.2	60	54.2	57	43.7	66	40.7	63	25.0	28
31.25	10.7	9.8	52.9	55	49.9	52	37.9	51	34.9	48	23.6	27
62.5	15.5	13.9	48.4	51	45.4	48	31.9	43	29.1	40	21.5	25
100	19.9	17.5	45.3	48	42.3	45	27.8	40	24.8	37	20.1	25
200	29.1	25.3	40.8	44	37.8	41	21.8	34	18.8	31	18.0	24
250	33.0	28.3	39.3	42	36.3	39	19.8	27	16.8	24	17.3	23

(\*) standard : values from IEC 61156-5

### ORDERING INFORMATION

CABLE 4 PAIRS			
P/N	DESCRIPTION	EXTERNAL DIAMETER	PACKAGING
VG64SH	CAT6 CABLE U/UTP 4 PAIRS LSZH	5.5 mm +/- 0.4	DRUM 1000M
VG64SH1	CAT6 CABLE U/UTP 4 PAIRS LSZH		COIL 100M
VG64SH5	CAT6 CABLE U/UTP 4 PAIRS LSZH		DRUM 500
VG64SHB	CAT6 CABLE U/UTP 4 PAIRS LSZH		BOX 305M
VG64SHBRIB	CAT6 CABLE U/UTP 4 PAIRS LSZH		REEL IN BOX 305M
VG64SHBB	CAT6 CABLE U/UTP 4PAIRS LSZH BLANC		BOX 305M
CABLE 2x4 PAIRS			
P/N	DESCRIPTION	EXTERNAL DIAMETER	PACKAGING
VG68SH	CAT6 CABLE U/UTP 2x4 PAIRS LSZH	5.5 x 12.5 mm +/- 0.4	DRUM 1000M
VG68SH1	CAT6 CABLE U/UTP 2x4 PAIRS LSZH		COIL 100M
VG68SH5	CAT6 CABLE U/UTP 2x4 PAIRS LSZH		DRUM 500