




POI-3004 Version: 1

Injecteur PoE Gigabit, 30W

The LevelOne POI-3004 is a Power over Ethernet (PoE) injector that not only delivers a cost-effective solution for power distribution, but also provides a seamless way of deploying Powered Devices (PDs) on existing LAN infrastructure.

With the use of power injectors, DC power of up to 30W and the data that comes from a non-PoE switch are merged together and then transmitted to a PD such as a PoE network camera, through the Ethernet cabling. This allows you to extend the use of your existing hardware investment without needing to buy extra PoE switches.

Furthermore, non-PoE devices like wireless access points can also be powered up remotely by adding additional PoE splitters, since power and data are further split into two cables. These devices can therefore be installed in hard-to-reach areas like ceilings where there are no outlets or electrical wiring nearby.

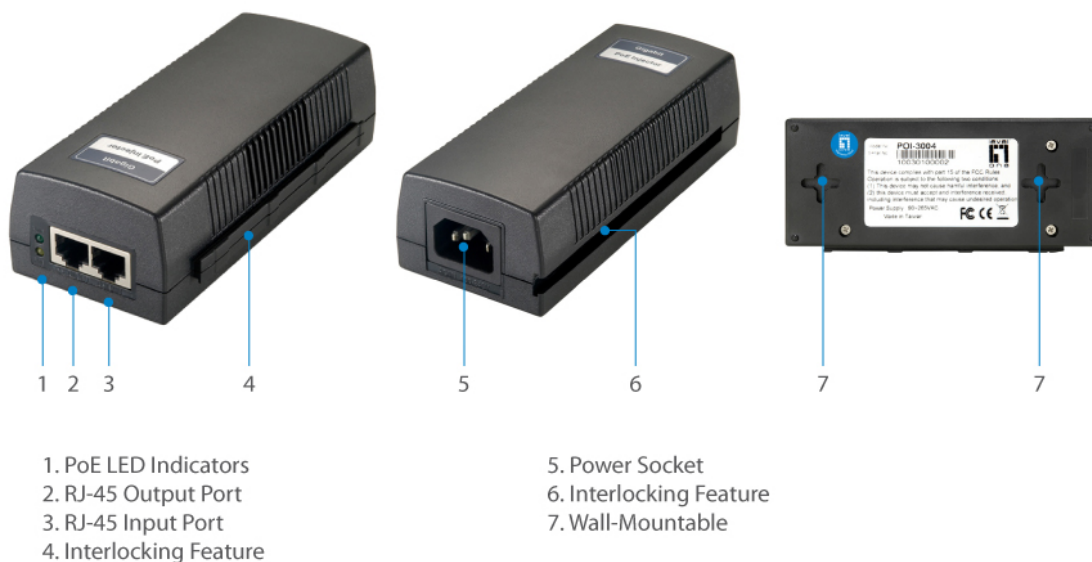

Caractéristiques Principales

- Élimine le besoin de disposer d'un adaptateur secteur volumineux et d'une ligne électrique
- Amène l'alimentation et les données à l'équipement via un câble Ethernet unique
- Alimentation à distance jusqu'à 100 m
- Fonctionnalité de verrouillage unique pour une installation aisée
- Protégé contre les surtensions pour une meilleure sécurité
- Installation prête à l'emploi simple



- Conception compacte et légère
- Bilan total de puissance PoE : 30 W et jusqu'à 30 W par port
-

Caractéristiques

Caractéristiques système

Normes et protocoles:

IEEE 802.3 10Base-T, Ethernet

IEEE 802.3u 100Base-TX, Fast Ethernet

IEEE802.3ab 1000Base-T, Gigabit Ethernet

Port:

1 x 10/100/1000Base-T RJ-45 Input Port

1 x 10/100/1000Base-T RJ-45 PoE Output Port

Indicateur:

Power, PoE

Affectation des broches et polarité:

4/5 (+), 7/8 (-)

Entrée d'alimentation:

PoE Power Output: DC 52V / 30W

Unit Output Voltage: DC 52V / 0.6A

Power Requirement: 100-240V AC, 50/60Hz, 0.8A

Power Consumption: 30W (Max.)

Conditions environnementales

Température de fonctionnement (°C):

Operating: 0°C ~ 45°C

Storage: 0°C ~ 70°C

Hygrométrie de fonctionnement:

Storage: 5% to 95%

Operating: 5 ~ 95%

Installation:

Wall mount

Spécifications physiques

Dimensions (L x P x H mm):

87.9 x 51.3 x 166mm

Poids (g):

350g

Fiabilité

MTBF:


87.1K (hours)

Approbation et conformité

EMI/EMS:

FCC Part 15, CE, RoHS

Schéma De Câblage

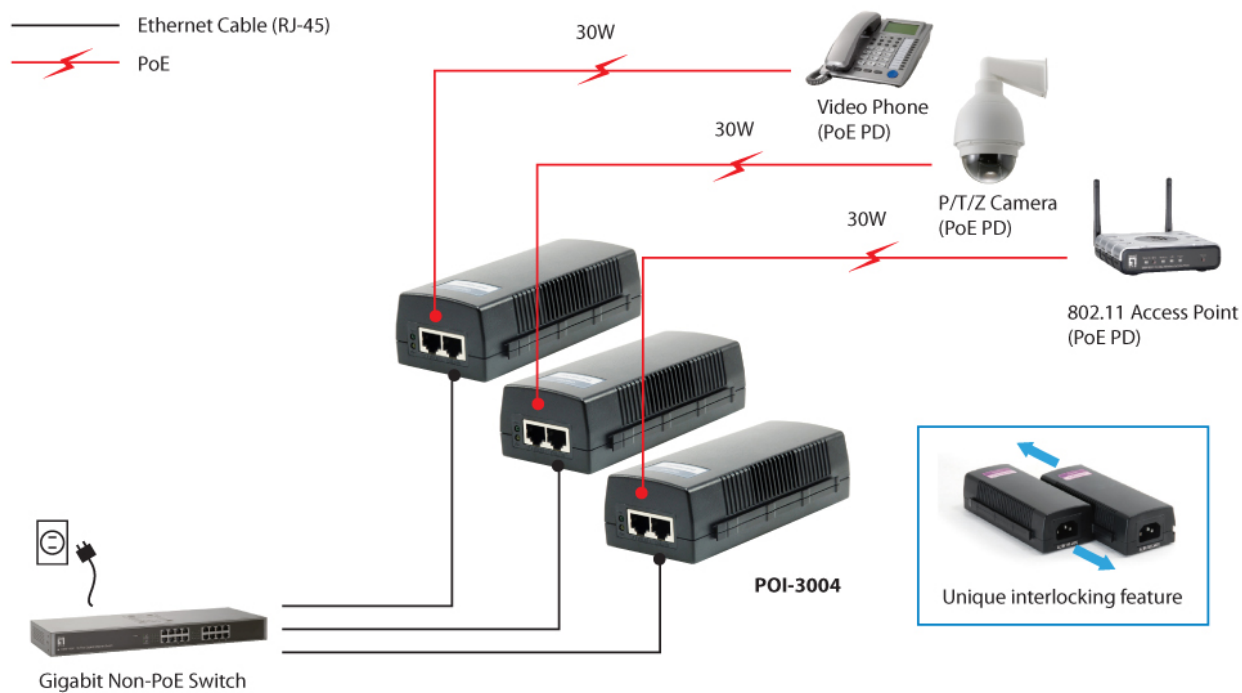

Informations Relatives À La Commande

POI-3004

Contenu De L'emballage

POI-3004

Cordon d'alimentation

Guide d'installation rapide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.