


P/N : FHPx15BLARSHC1

Shielded speaker cables – double armour – C1

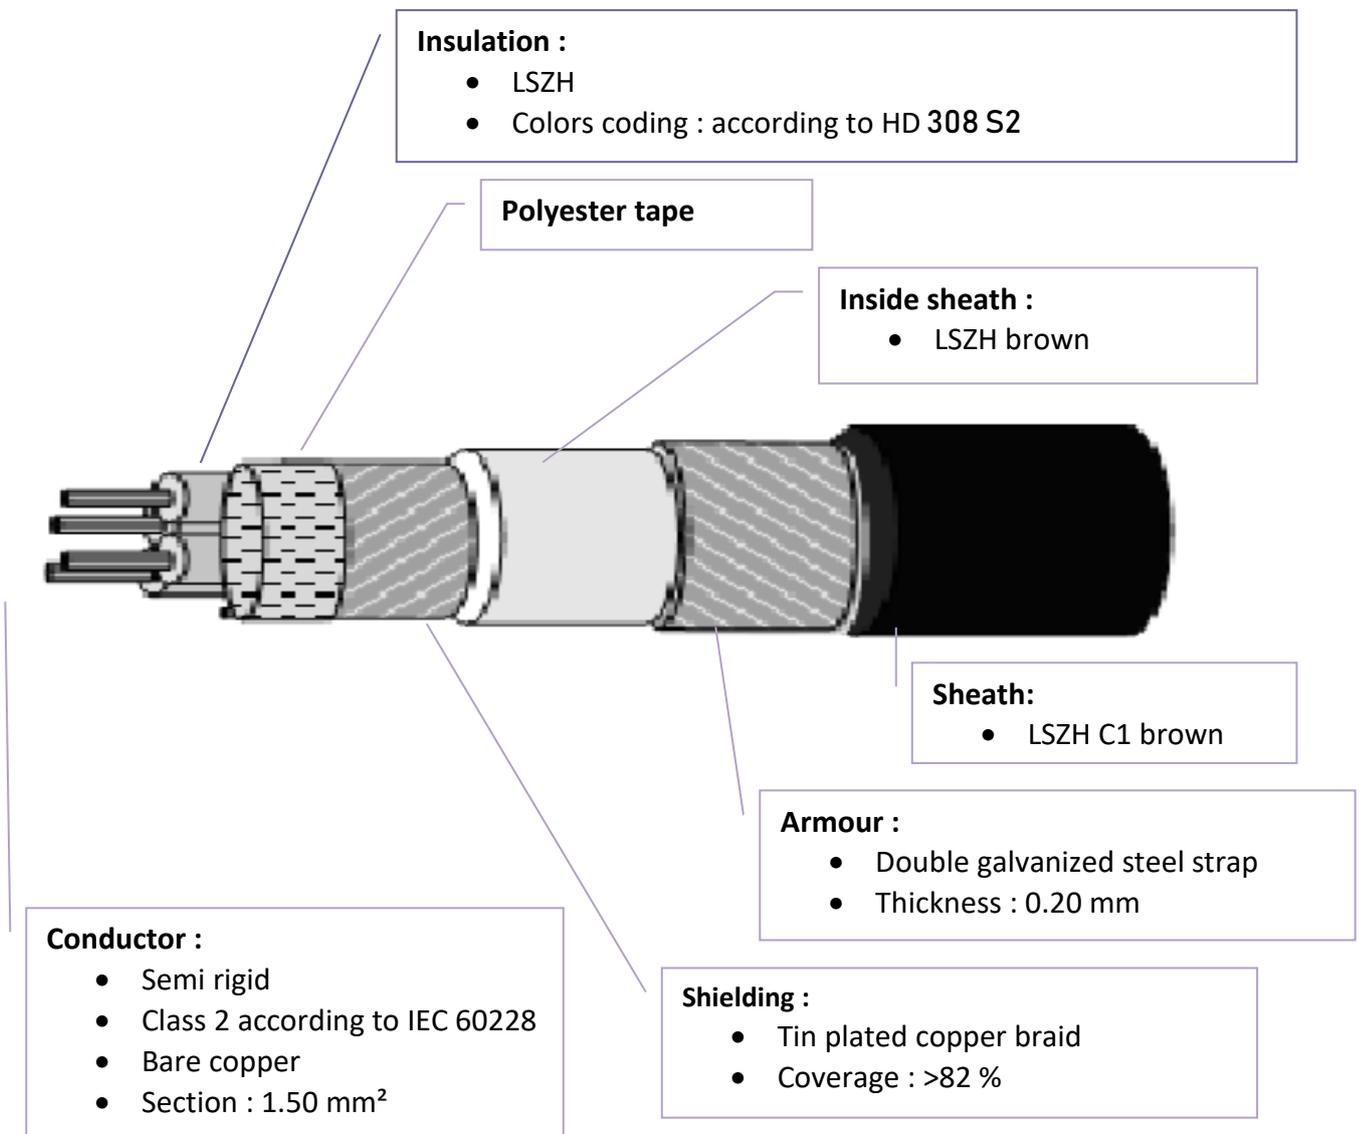

Electrical properties

- Maximum voltage (U°/U) : **300 V/500**
- Dielectric rigidity : **3000 V dc 1 mn**
- Conductor resistance at 20°C : **≤ 12.1 Ω/km**

P/N : FHPx15BLARSHC1

Shielded speaker cables – double armour – C1

Environnemental characteristics



- Temperature range: - 15°C → + 70°C



- Minimum bending radius – static use : 15 x Ø



- Conform to **RoHS directive**



- Flame retardant : **C1** selon **NF C 32-070**
- Determination of halogen rate : **IEC 60754-1**
- Determination of corrosiveness of combustion gas : **IEC 60754-2**
- Determination of smoke density : **IEC 60332-3-24**

Part numbers

 REF.	Nb of conductors	Section	
FHP215BLARSHC1	2	1.50 mm ²	11.00 mm
FHP415BLARSHC1	4	1.50 mm ²	12.20 mm
FHP715BLARSHC1	7	1.50 mm ²	14.30 mm