




MK6FS

CAT6 RJ45 full shielded tool less connector - MK range



Benefits ⁺

- CAT6 RJ45 full shielded tool less connector
- 4 insertors for a fast and simple connection
- Connector with lateral or axial back pack

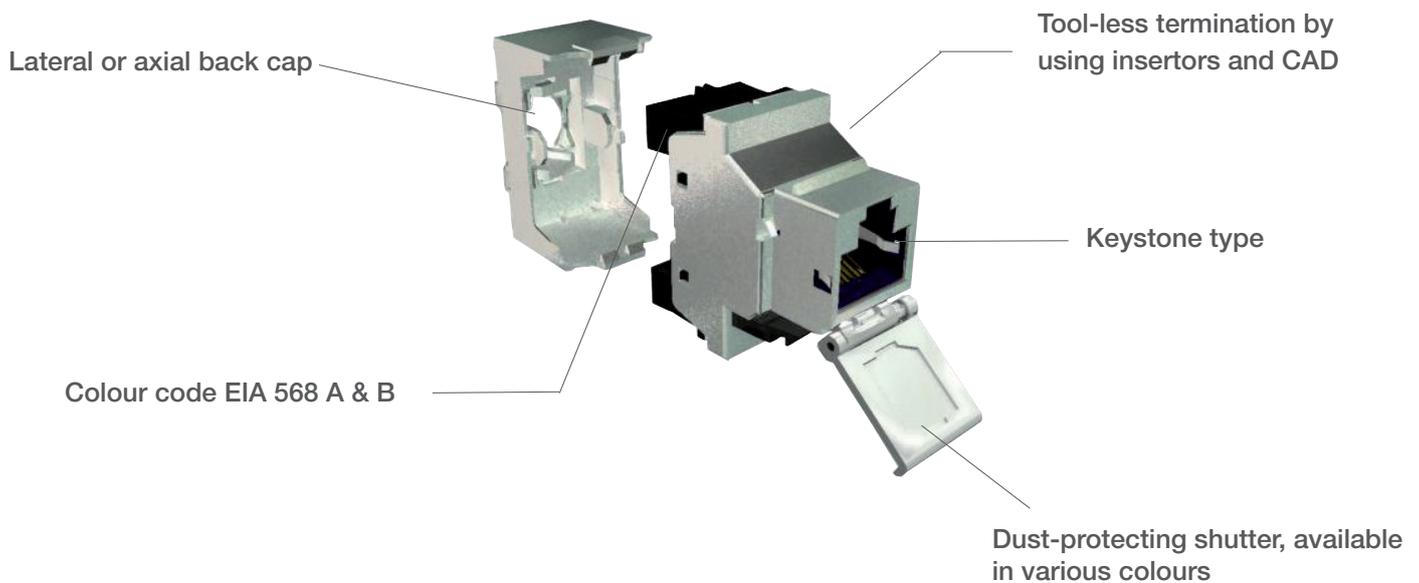

STANDARDS

CONNECTOR	SYSTEM
IEC 60603-7-5 CAT6	EIA/TIA 568-C.2 CAT6
EN 60603-7-5	ISO 11801 ClassE Ed2
	EN 50173-2
ISO/IEC TR24750 and TSB-155	



MK6FS

CAT6 RJ45 full shielded tool less connector - MK range

TECHNICAL PROPERTIES

CAD :	Bronze + Platine / Cu + SnPb 8µm
Stranded conductor:	AWG 24 to AWG 22
Contact :	Bronze, Platine Ni and Au 0.2µm
Body:	PC UL94V0
Color code :	T568A and T568 B
Weight:	0,127 Kg

ELECTRICAL PROPERTIES

Contact resistance :	≤ 20 mΩ IEC 60512-2-1 Test 2a
Input/output resistance :	≤ 200mΩ IEC 60512-2-1 Test 2a
Insulation resistance :	≥ 500MΩ to 100V DC IEC 60512-3-1 Test 3a
Voltage :	≥ 1000V DC contact to contact ≥ 1500V DC contact to masse
Cycle insertion :	> 500
Operating voltage :	≤ 72V DC
Power handling :	≤ 10W
Vibration disturbance :	≤ 10 µs (25-250 Hz, 5g, 3 axes) (IEC 60512-4-1 Test 2e)
Operating temperature:	-40°C to +70°C

RELATED PRODUCTS

REF	DESCRIPTION	PACKAGING
MK6Vx	Coloured dust protecting shutters for MK range	8

ORDERING INFORMATION

REF	DESCRIPTION	PACKAGING
MK6FS	CAT6 RJ45 full shielded tool less connector - MK range	8