




## MK6NB

CAT6 RJ45 unshielded tool less connector - MK range



## Benefits +

- CAT6 RJ45 UTP tool-less connector
- 4 insertors for a fast and simple connection
- Connector with lateral or axial back pack

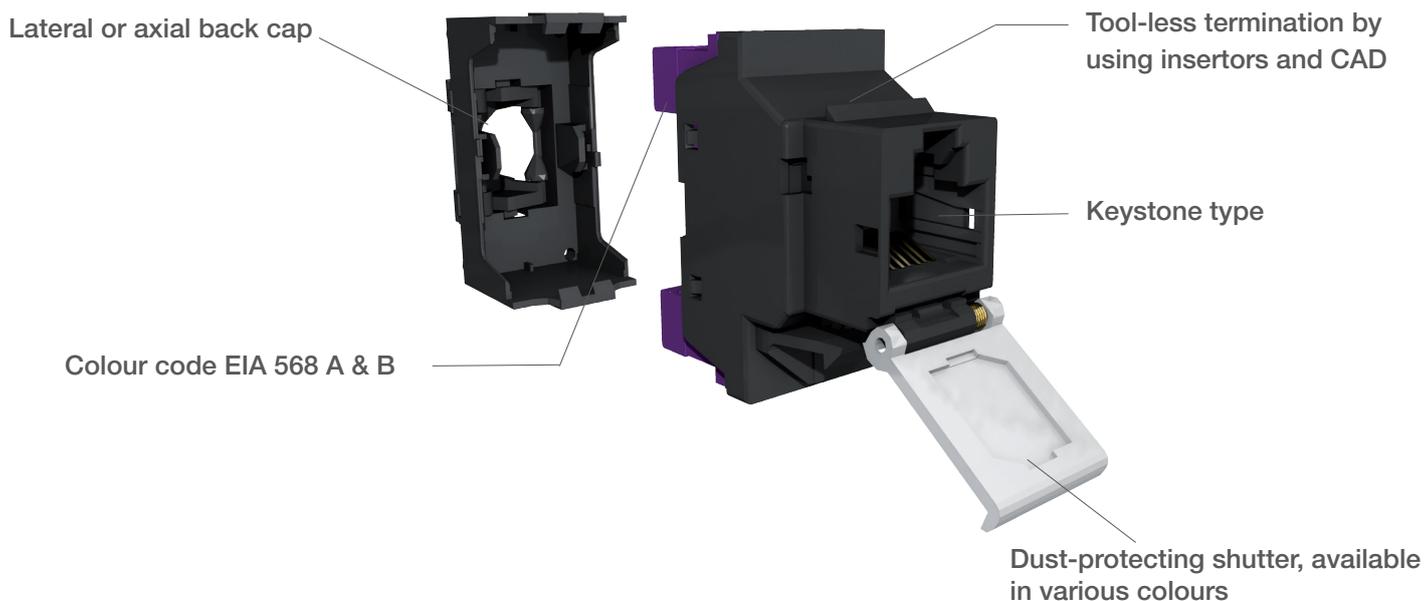

## STANDARDS

CONNECTOR	SYSTEM
IEC 60603-7-4 CAT6	EIA/TIA 568-C.2 CAT6
EN 60603-7-4	ISO 11801 ClassE
	EN 50173-2
ISO/IEC TR24750 and TSB-155	



## MK6NB

CAT6 RJ45 unshielded tool less connector - MK range

### TECHNICAL PROPERTIES

CAD :	Bronze + Platine / Cu + SnPb 8µm
Stranded conductor:	AWG 24 to AWG 22
Contact :	Bronze, Platine Ni and Au 0.2µm
Body :	PA 66
Colour code :	T568A and T568 B
Weight:	0.118 Kg

### ELECTRICAL PROPERTIES

Contact resistance :	≤ 20 mΩ IEC 60512-2-1 Test 2a
Input/output resistance :	≤ 200mΩ IEC 60512-2-1 Test 2a
Insulation resistance:	≥ 500MΩ to 100V DC IEC 60512-3-1 Test 3a
Voltage :	≥ 1000V DC contact to contact
Cycle insertion :	> 500
Operating voltage:	≤ 72V DC
Power handling :	≤ 10W
Vibration disturbance :	≤ 10 µs (25-250 Hz, 5g, 3 axes) (IEC 60512-4-1 Test 2e)
Operating temperature:	40°C to +70°C

### RELATED PRODUCTS

REF	DESCRIPTION	PACKAGING
MK6Vx	Coloured dust protecting shutters for MK range	8

### ORDERING INFORMATION

REF	DESCRIPTION	PACKAGING
MK6NB	CAT6 RJ45 unshielded tool less connector - MK range	8