



NC5MXTOP

Fiche XLR TOP Mâle 5 PTS



+ ADVANTAGES

- True Outdoor Protection (TOP) connector
- Waterproof and robust for harsh and demanding environments
- Power connector with breaking capacity
- Easy and reliable locking system

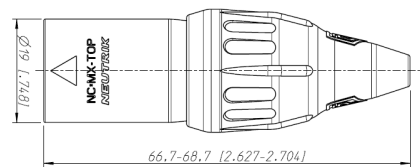

DESCRIPTION / APPLICATIONS

- Sound system
- Lights
- Signage and LED screens

STANDARD

CONNECTOR : Certified ENEC - IEC 60320

and certified UL498

FLAMMABILITY : UL 94 HB

PROTECTION CLASS: IP 65, UL50E

ELECTRICAL CHARACTERISTICS

CAPACITANCE BETWEEN CONTACTS : ≤ 4 pF

CONTACT RESISTANCE: ≤ 3 m Ω

DIELECTRIC STRENGTH : 1.5 kVdc

INSULATION RESISTANCE : >10 G Ω IEC 68-2-30

RATED CURRENT PER CONTACT : 16 A rms

RATED VOLTAGE : < 50 V

MECHANICAL / TECHNICAL PROPERTIES

CABLE O.D. : 5.0 - 8.0 mm

INSERTION FORCE : ≤ 20 N

WITHDRAWAL FORCE : ≤ 20 N

LIFETIME : >1000

WIRESIZE : max. 1.5mm²

WIRESIZE : max. 16 AWG

CONTACTS : Brass

SHELL : Stainless steel

TEMPERATURE RANGE : -30°C to +80°C

ORDER INFORMATION

| PART NB | DESCRIPTION | PACKAGING |
|----------|-------------------------|--------------|
| NC5MXTOP | FICHE XLR FEMELLE 5 PTS | Individually |