


TMxxyyFzPz

19" floor standing cabinet - perforated rear / front doors - Technic1000



+ BENEFITS


- Load capacity tested at 1250 Kg
- Mechanical structure on aluminum corner : excellent stability of the cabinet
- Additional 12U available on 19" (width 800)
- Vertical cable management for patch cords



600x600 / 600x800
800x600 / 800x800
800x1000 / 800x1200



1250Kg



42U / 47U



DESCRIPTION / APPLICATIONS

ENHANCED MECHANICAL STRUCTURE


- Aluminum trihedral angles enabling an excellent rigidity and stability of the cabinet even in case of maximum loading
- 6 reinforced bar studied to allow a loading capacity up to 1250kg
- 19" front mounting, 20/10 thickness, in galvanized steel to ensure an electrical continuity to the ground
- Sturdy structure in steel sheet
- Adjustable mounting depth by slide system
- Epoxy Grey painting RAL 7016
- Grounding kit

SPECIAL CONSTRUCTION

- Perforated front and rear door to allow a better and natural ventilation : single door for cabinet 600mm width and double door for cabinet 800mm width
- Doors are equipped with a 3 points locking mechanism with turning lever lock

EASY ACCESSIBILITY

- 270° opening doors for a better cabinet accessibility
- Roof equipped with a precut entry and panel brush allow different entry with a maximal aperture up to 550mm
- Pre cutted aperture on the rear of the roof for a cable entry from the back
- 12U vertical available on the 19" mounting : 3U per mounting
- Possibility to equip the cabinet with vertical cable tray (optional)
- Quick release and reversible doors
- Side panel : easy to release, lockable and removable
- Sliding access panel at the bottom of the cabinet equipped with a rubber seal to avoid cable pinch

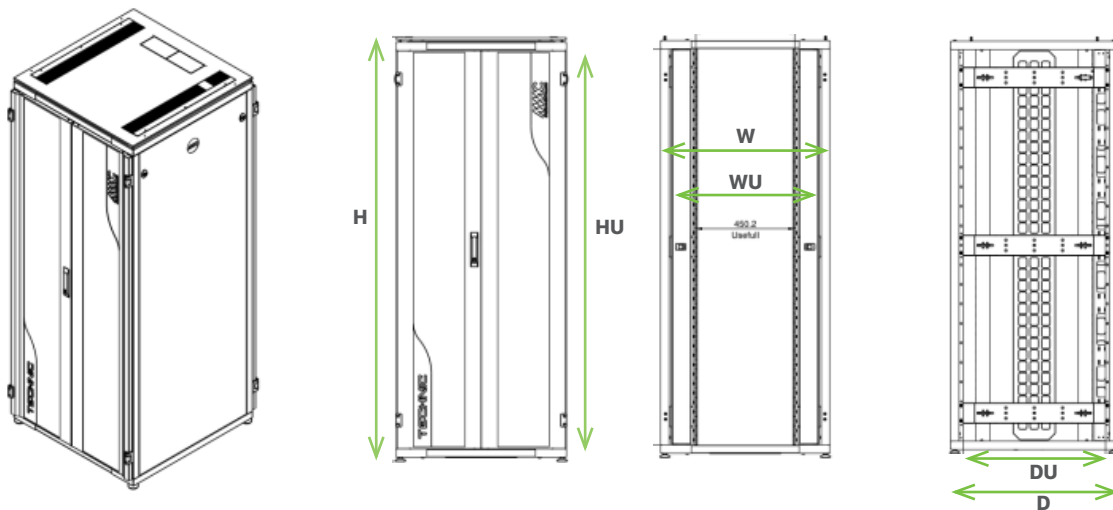

DRAWINGS AND DIMENSIONS

REF	H	HU	W	WU	D	DU
TM42610FPRP	1995	1866.9	609	526	1076	960
TM4288F2PR2P	1995	1866.9	809	726	876	760
TM42810F2PR2P	1995	1866.9	809	726	1076	960
TM42812F2PR2P	1995	1866.9	809	726	1276	1126
TM4288F0R0SP0	1995	1866.9	809	726	816	760
TM47812F2PR2P	2217	2089.15	809	726	1276	1126

RELATED PRODUCT

ACCESSORIES FOR SERVER AND SWITCH

	ITEM	DESCRIPTION
SHELVES	49PM1U250G	19" 1U modem shelf depth 250mm
	BPF1U450AD	19" fixed shelf adjustable in depth - 450mm- 1U
	BPF2U550AD	19" fixed shelf adjustable in depth - 550mm - 2U
	BPG1U350	19" sliding plate 350mm depth 350mm
	BPG1U550	19" sliding plate 350mm depth 550mm

SECURITY AND VENTILATION ELEMENTS

	ITEM	DESCRIPTION
ELECTRICAL	BMASSE19	Grounding kit for 19" cabinet
VENTILATION	ACB2V	2 fans module for roof installation
	ACB4V	4 fans module for roof installation
MECHANICAL	ACTHERMOST	Thermostat for fans
	ACCASTOR	Castor set for Classic and Technic cabinet

ACCESSORIES

	ITEM	DESCRIPTION
CABLE TRAY	ACCABLTR42200	Cable tray 200mm width
CABINET CHAIRS	ACCHAIR 1628 xx	Cabinet chair with adjustable height 158-280.5 mm
	ACCHAIR 2852 xx	Cabinet chair with adjustable height 278-520.5 mm

Replace xx by the dimensions of the cabinet : **66** = 600 x 600mm - **88** = 800 x 800mm - **68** = 600 x 800mm - **610** = 600 x 1000mm - Etc ...

ORDERING INFORMATION

ITEM	NUMBER OF U	DESCRIPTION	LOAD CAPACITY
TM42610FPRP	42	19" floor standing cabinet - Technic1000 - 600X1000 - 1 front / 1 rear perforated doors	1000 Kg
TM4288F2PR2P		19" floor standing cabinet - Technic1000 - 800X800 - 2 front / 2 rear perforated doors	1000 Kg
TM42810F2PR2P		19" floor standing cabinet - Technic1000 - 800X1000 - 2 front / 2 rear perforated doors	1000 Kg
TM42812F2PR2P		19" floor standing cabinet - Technic1000 - 800X1200 - 2 front / 2 rear perforated doors	1000 Kg
TM4288F0R0SP0		19" floor standing cabinet frame - Technic1000 - 800X800	1000 Kg
TM47812F2PR2P		47	19" floor standing cabinet - Technic1000 - 800X1200 - 2 front / 2 rear perforated doors